



Environmental
Instruments
Canada Inc.

(CT007-EC)

Energy Compensated dose rate meter that connects to your phone

Features

- Compact, Lightweight Energy Compensated survey meter
- Low Cost
- Single-Button Local Operation
- Connects to GammaGuard by Bluetooth Low Energy (BLE)
- Uses the LND 7149 GM tube
- Rich User Interface Provided by Smartphone Display
- Can Log Data to the Smartphone or to the RadResponder Network

Introduction

The CT007-EC is a energy compensated survey meter type instrument. It uses the LND 7149 GM tube. Its compact form factor and long battery life make it a convenient and easy to use survey meter.

It can be used as a stand alone survey meter, with a simple one button interface, and an OLED display to show data. It also can connect to a smartphone via Bluetooth Low Energy (BLE). When connected to a phone, our GammaGuard app provides a rich user interface (UI). The user only interacts with the phone and CT007-EC remains ergonomically out of the way in the user's pocket or at a remote location. The GammaGuard app can run in the background and alert the user of elevated radiation levels.

The GammaGuard app allows for time and date stamped data logging with GPS coordinates. The data can be logged to a file on the phone and it can (optionally) be logged to web based databases, such as RadResponder, facilitating a coordinated incident response.



Specifications

Indicated Use: Energy compensated survey (dose rate) meter

Detector: LND 7149 GM tube

Measurement Units: User selectable (μSv , mRem or counts.)

Sensitivity: ~ 9 CPM/ $\mu\text{Sv/h}$ (Co-60)

Linearity: Linear response to 5000 $\mu\text{Sv/h}$

Resolving Time: 145 microseconds

Response Time: User selectable from 1 to 30s or Auto. Display updates every second

Energy Compensation: Energy compensated GM tube

Local Display: 2.2 x 1.2 cm OLED. Font size automatically adjust to display as many digits as needed.

Local Controls: One push button – short press (<2s) to toggle screens; long press (>2s) to enter/exit Sleep mode

Wireless Communication: Bluetooth Low Energy connecting to GammaGuard.

Batteries: 2 standard AA batteries

Operating Time: 600 hours connected to GammaGuard, 300 hours if using local display.

Size: 5 × 10.5 × 1.8 cm (2 × 4.1 × 0.7 in.)

Weight: 140 g (including batteries)


The GammaGuard System

The CT007-EC, like many of our other radiation instruments, connects to our GammaGuard app.

By itself, the GammaGuard app, installed on your smartphone, can provide basic radiation detection and warn the user of dangerous radiation levels, using only the phone's camera as a radiation sensor. Other more sophisticated or sensitive radiation measurement instruments, such as the CT007-EC and Nano-Nukes can be wirelessly connected to GammaGuard.

The GammaGuard App:

- Provides a large, easy to read display.
- Has the ability to interpret readings for non-technical users.
- Uses one consistent user interface across all detectors so that there is only one system to learn.
- Can automatically save data to a file and upload data to a central database, facilitating coordinated incident response.
- Will run in the background while performing other tasks.
- Alerts the user to elevated radiation levels, even when the app is not in the foreground.
- Displays the radiation level remotely when the external detector is up to 40 m away.
- Changes background from green to yellow to red to indicate low, elevated and high levels of radiation.

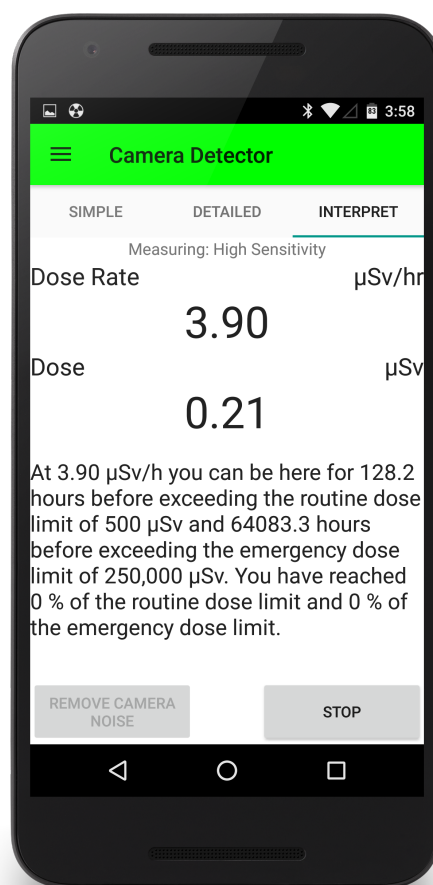

For more information please contact:
Environmental Instruments Canada Inc.
admin@eic.nu
306 974 6055